

Platforms

Platforms - Rolling Scaffold

On this page



[What should you do when using a rolling scaffold?](#)

[What should you not do when using a rolling scaffold?](#)

What should you do when using a rolling scaffold?

- Make sure that you are trained properly to erect and use a rolling scaffold.
- Assemble the rolling scaffold according to manufacturer's instructions.
- Inspect the rolling scaffold before each use and after any modifications.
- Make sure that the surface on which the scaffold is moved is level and without holes or obstructions.
- Brace all rolling scaffolds horizontally and diagonally.
- Cleat or secure all planks.
- Prevent joints from separating.
- Provide workers with a safe method to access and exit from the scaffold.
- Secure access ladders.
- Make sure the platform has appropriate guardrails (hand, mid, toe).
- Ensure that each wheel or castor is equipped with brakes to prevent rolling and swivelling.
- Lock the caster brakes before climbing onto the scaffold.
- Secure or remove all material, equipment and personnel from the platform before moving it.
- Push towards the base when moving.
- Use the built-in access ladders to reach the platform.
- Increase the scaffold's base dimension(s) by installing outriggers.

- Refer to occupational health and safety regulations in your jurisdiction for height stability requirements.
- Refer to occupational health and safety regulations in your jurisdiction to determine when fall arrest systems may be necessary (e.g., when working at a certain height, accessing or exiting the scaffold, or when guardrails are not present). If fall arrest systems are necessary, workers must be appropriately trained before use.

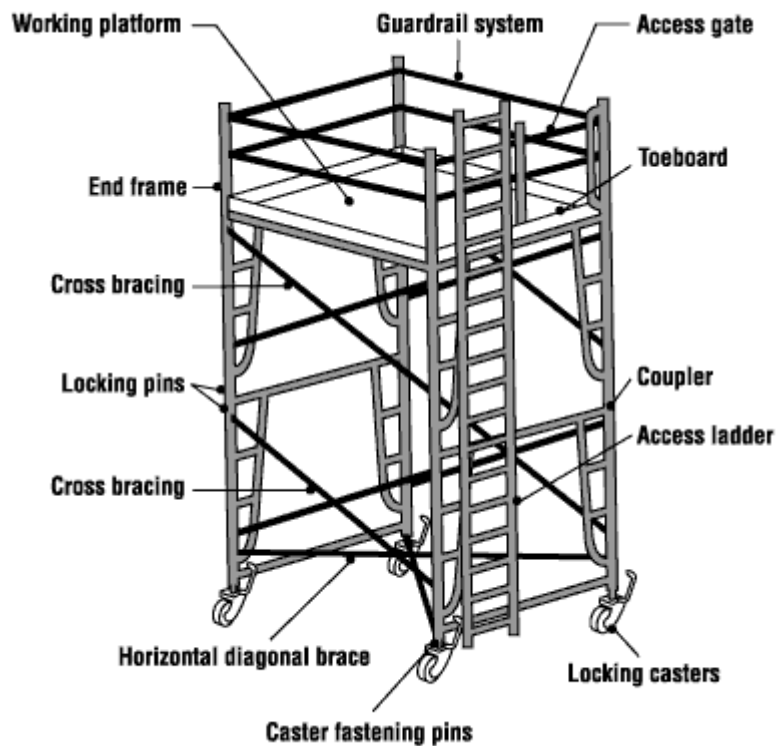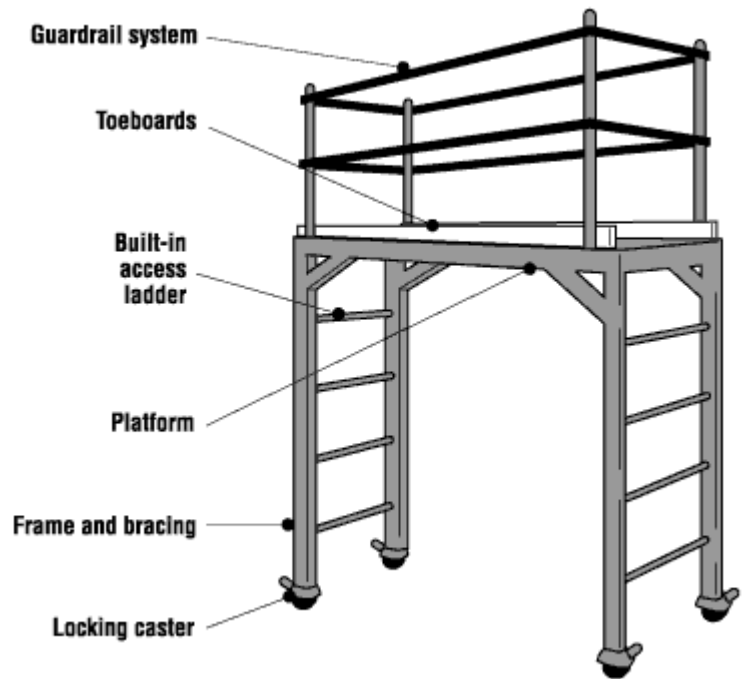

What should you not do when using a rolling scaffold?

- Do not stay on the scaffold when it is being moved or try to move it yourself while on it. If a worker must remain on the scaffold, make sure the worker is secured to the building (not the scaffold) with appropriate fall protection equipment (e.g., safety harness and lanyard).
- Do not try to move a rolling scaffold without enough help. Watch out for slopes, holes, debris, and overhead obstructions.
- Do not use a rolling or mobile scaffold with pneumatic tires as the only support while used, erected or dismantled.
- Do not extend adjusting screws more than the manufacturer recommends.
- Do not allow the working platform height to exceed three times the base width, unless it is guyed and equipped with outriggers or otherwise stabilized.
- Do not use powered devices to move scaffolds.
- Do not lean access ladders against rolling scaffolds.
- Do not over-reach from the scaffold.
- Do not climb using the frame.
- Do not stand on guardrails.
- Do not overload the scaffold.

Fact sheet last revised: 2018-02-05

Disclaimer

Although every effort is made to ensure the accuracy, currency and completeness of the information, CCOHS does not guarantee, warrant, represent or undertake that the information provided is correct, accurate or current. CCOHS is not liable for any loss, claim, or demand arising directly or indirectly from any use or reliance upon the information.